





## Turbulator Tape Application Instructions

Depending on water temp, salinity, and other factors, some X-1 Pro 1550s may whistle at speed. Some customers enjoy the sound (like a jet) while others do not. Should you wish to reduce this whistle, you can apply turbulator tape as described below. It is important to place the tape exactly as described. If the tape is closer to the trailing edge, for example, it cannot sufficiently disturb the water flow to silence the wing. The tape does not affect the performance of the wing.

Please apply to a completely dry wing. Let your wing warm up a little in the sun.

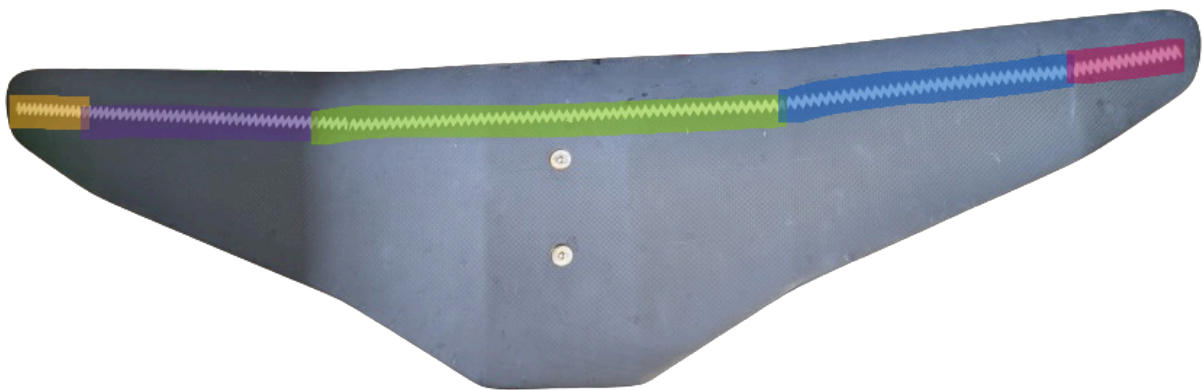

Install the tape parallel to each section's trailing edge. Cut the tape into 5 pieces as highlighted in the above pic and apply each section as straight as possible. Press firmly down on the tape to get a good bond with the wing. Apply the tape exactly as measured below.

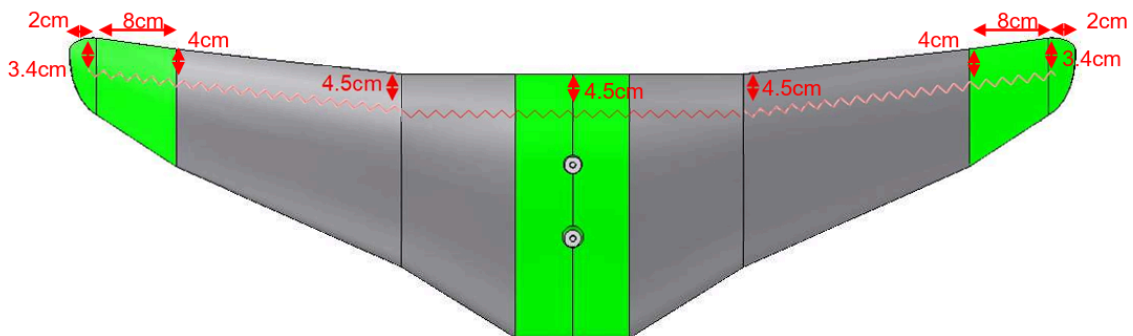

The measurements given above measure the distance from the trailing edge to the tape edge (not the middle of the tape).

If the tape lifts off over time, (mine is sticking very well - no issues in months of use) you can use crazy glue (ethyl cyanoacrylate) to re-attach.